


Power Supply Housing
Drawing# 43103003
dated on December 13, 2011

Table 3.3.2 power distribution of redundant power system EMA2V4460 configuration

DC Output	Minimum Continuous	Maximum Continuous	Max. combined power	Total power
+3.3V	0.0A	22A	220W	460W
+5V	0.0A	35A		
+12V	0.5A	30A	360W	
-5V	0.0A	0.5A	2.5W	
-12V	0.0A	1.0A	12W	
+5V _{usb}	0.1A	2.0A	10W	

Table 3.3.2 power distribution of redundant power system EMA2V4550 configuration

DC Output	Minimum Continuous	Maximum Continuous	Max. combined power	Total power
+3.3V	0.0A	24A	180W	550W
+5V	0.0A	30A		
+12V	0.5A	41A	492W	
-5V	0.0A	0.5A	2.5W	
-12V	0.0A	1.0A	12W	
+5V _{sb}	0.1A	2.0A	10W	

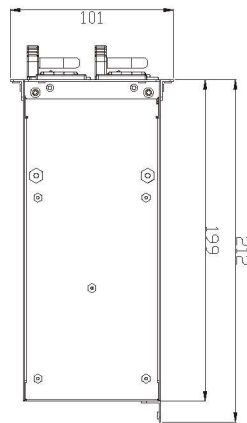


Wiring Harness Drawing#
305030031000 dated on
December 09, 2011

Power Wire LENGTH (unit:mm)	
P24	500
PA-1	500
PA-2	500
PB	500
PC	500
PD	100
PE	100
PF	100
PG	500
PH	100
PI	100
PJ	100
PK	500
PL	100
PM	500
PN	100
PO	100

TOLERANCES: +20

修訂 REVISIONS		
版次 REV.	記述 DESCRIPTION	日期 DATE

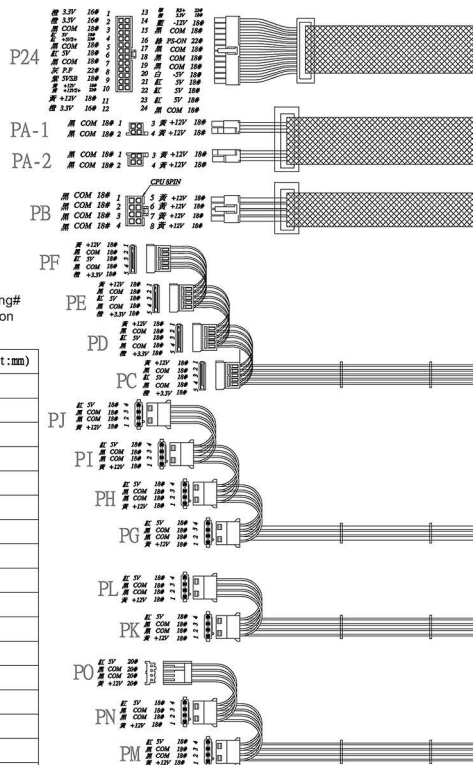

		中國工控有限公司(香港) www.chinaipc.cc	
品名: PS2 460W and 550W NAME: Mini-Redundant Power Supply with PFC			
料號: EMA2V4460, EMA2V4550 NO:		櫃號: FILE NO:	
圖號: DRAW NO:		規格: SPEC:	
單位: mm UNITS:		編號: SHEET:	
版本: 0.0 REV. NO:			